

TRIPLEXOR

ATP SERIES



- ◆ For Triplox Control of three loads
- ◆ Works with 3 Switch inputs- LEAD, LAG & LAG2
- ◆ Optional top-mounted switch allows use as standard Triploxor or as Duplexor until system expansion requires additional third Load
- ◆ Control voltages of 120V AC or 24V AC/DC
- ◆ Plug-in enclosure utilizes industry-standard 8 Pin octal or 12 Pin square sockets
- ◆ Input Switch Failure Indication
- ◆ Pilot Duty Rating




Better. By Design.

800.238.7474
WWW.MACROMATIC.COM
SALES@MACROMATIC.COM

Macromatic ATP Series Triploxors are used in three load applications requiring both the optimization of load usage by equalizing the run time of multiple loads and additional capacity in case of excess load requirements.

As standard, these products operate as a normal Triploxor with three inputs. An optional version with an 8-position rotary switch is offered. This allows the unit to operate as either a:

- (a) standard Triploxor
- (b) Triploxor locking Load 1, 2 or 3 as the first to be energized (Lead Load)
- (c) standard Duplexor until system expansion requires control for a third Load
- (d) Duplexor locking Load 1 or 2 as the first to be energized (Lead Load)



All versions offer an indication of a switch failure (out-of-sequence) - LEDs will flash if any switch closes out of sequence. Also, if power is lost and returns with more than just the LEAD Switch closed, there is a fixed 10 second delay between energization of the first output and subsequent outputs to prevent all Loads from coming on at the same time.

FUNCTION	CONTROL VOLTAGE	CATALOG NUMBER	WIRING/SOCKET
TRIPLEXOR/ DUPLEXOR w/o Switch	120V AC 24V AC/DC	ATP120A1 ATP024A1	8 Pin Octal 70169-D DIAGRAM 184
TRIPLEXOR/ DUPLEXOR w/ Switch	120V AC 24V AC/DC	ATP120A1R ATP024A1R	 DIAGRAM 184
TRIPLEXOR/ DUPLEXOR w/ Switch	120V AC 24V AC/DC	ATP120A7R ATP024A7R	12 Pin Square SD12-PC DIAGRAM 185

TRIPLEXOR ATP SERIES

APPLICATION DATA

Voltage Tolerances: +10%/-15% at 50/60Hz. (AC);
+10%/-15% of control voltage (DC)

Load (Burden): Less than 2VA for all voltages

Output Contacts: (3) SPNO 3A @ 24/120V AC General Purpose;
C300 Pilot Duty; 1/6HP @ 24/120VAC

Life:

Mechanical: 10,000,000 operations;
Full Load: 100,000 operations

Temperature: Operating: -28° to 65°C (-18° to 149°F)
Storage: -40° to 85°C (-40° to 185°F)

Time Delay: If power is lost & returns with more than just the LEAD Switch closed, there is a fixed 10 second delay between energization of the second output (Triplex & Duplex mode) & third output (Triplex mode only) to prevent all Loads from coming on at the same time.

LED Indication: One of the Red LEDs will be steady ON to indicate which Load will be energized first; all will flash (3 in Triplex mode or 2 only in Duplex mode) to indicate a switch out-of-sequence error.

Optional Selector Switch Settings:


Allows unit to operate as standard Triplexor or Duplexor, or lock selected Loads to operate first (Lead Load) each time:

Triplex	Duplex
Triplex--Lead 1	Duplex--Lead 1
Triplex--Lead 2	Duplex--Lead 2
Triplex--Lead 3	

Approvals:  US
File #E109466

 LISTED
IND. CONT. EQUIP.
5017
with appropriate socket
File #E109466

DIMENSIONS

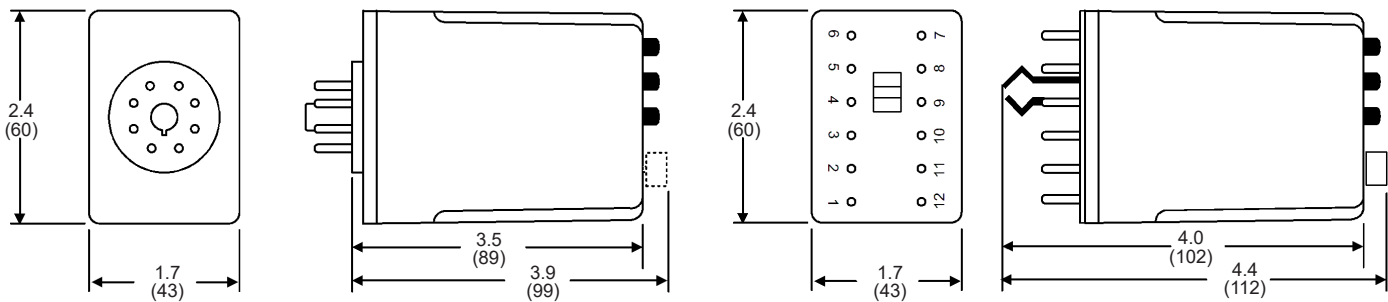

8 Pin Products Only

12 Pin Products Only

All Dimensions in Inches (Millimeters)